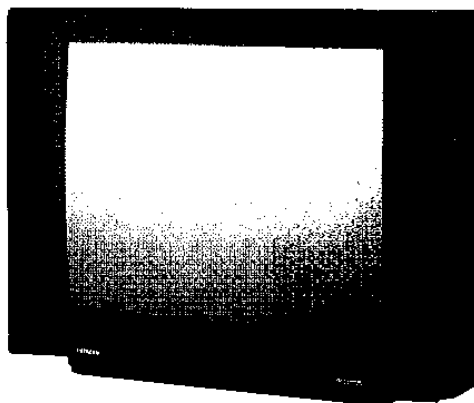


HITACHI**C2565TN
C2865TN**

SERVICE MANUAL SUPPLEMENT

CAUTION:

Before servicing this chassis, it is important that the service technician read the "Safety Precautions" and "Product Safety Notices" in this supplement.

**TECHNICAL SPECIFICATIONS**

TV standard 625 lines

Channel coverage UHF channels 21-68
and PAL 60 (via VCR)Aerial input impedance 75 ohm
unbalanced

Intermediate frequencies

I.F. Luminance 39.5 MHz

I.F. Sound 33.5 MHz

I.F. Chrominance 35.07 MHz

FM Sound 6.0 MHz

Colour sub carrier 4.43 MHz

Focusing Electro static

Mains voltage 240 V 50 Hz

Fuse 4A


Programme selectors Channel UP/DOWN buttons
with 59 programme
remote control

TV Speakers Left/Right 8 Ohms 12 W

Power consumption C2565TN 90 W Approx.
C2865TN 96 W Approx.Picture tube C2565TN 59 cm Type
C2865TN 66 cm Type

Dimensions:	C2565TN	C2865TN
Width	701 mm	772 mm
Height	520 mm	576 mm
Depth	464 mm	500 mm
Weight	30 kg	35 kg

* Apart from the deletion of the DOLBY circuitry, these models are very similar to the C2574TN, C2874TN chassis. Therefore, use this supplement in conjunction with the service manual for those models, part No. X830936

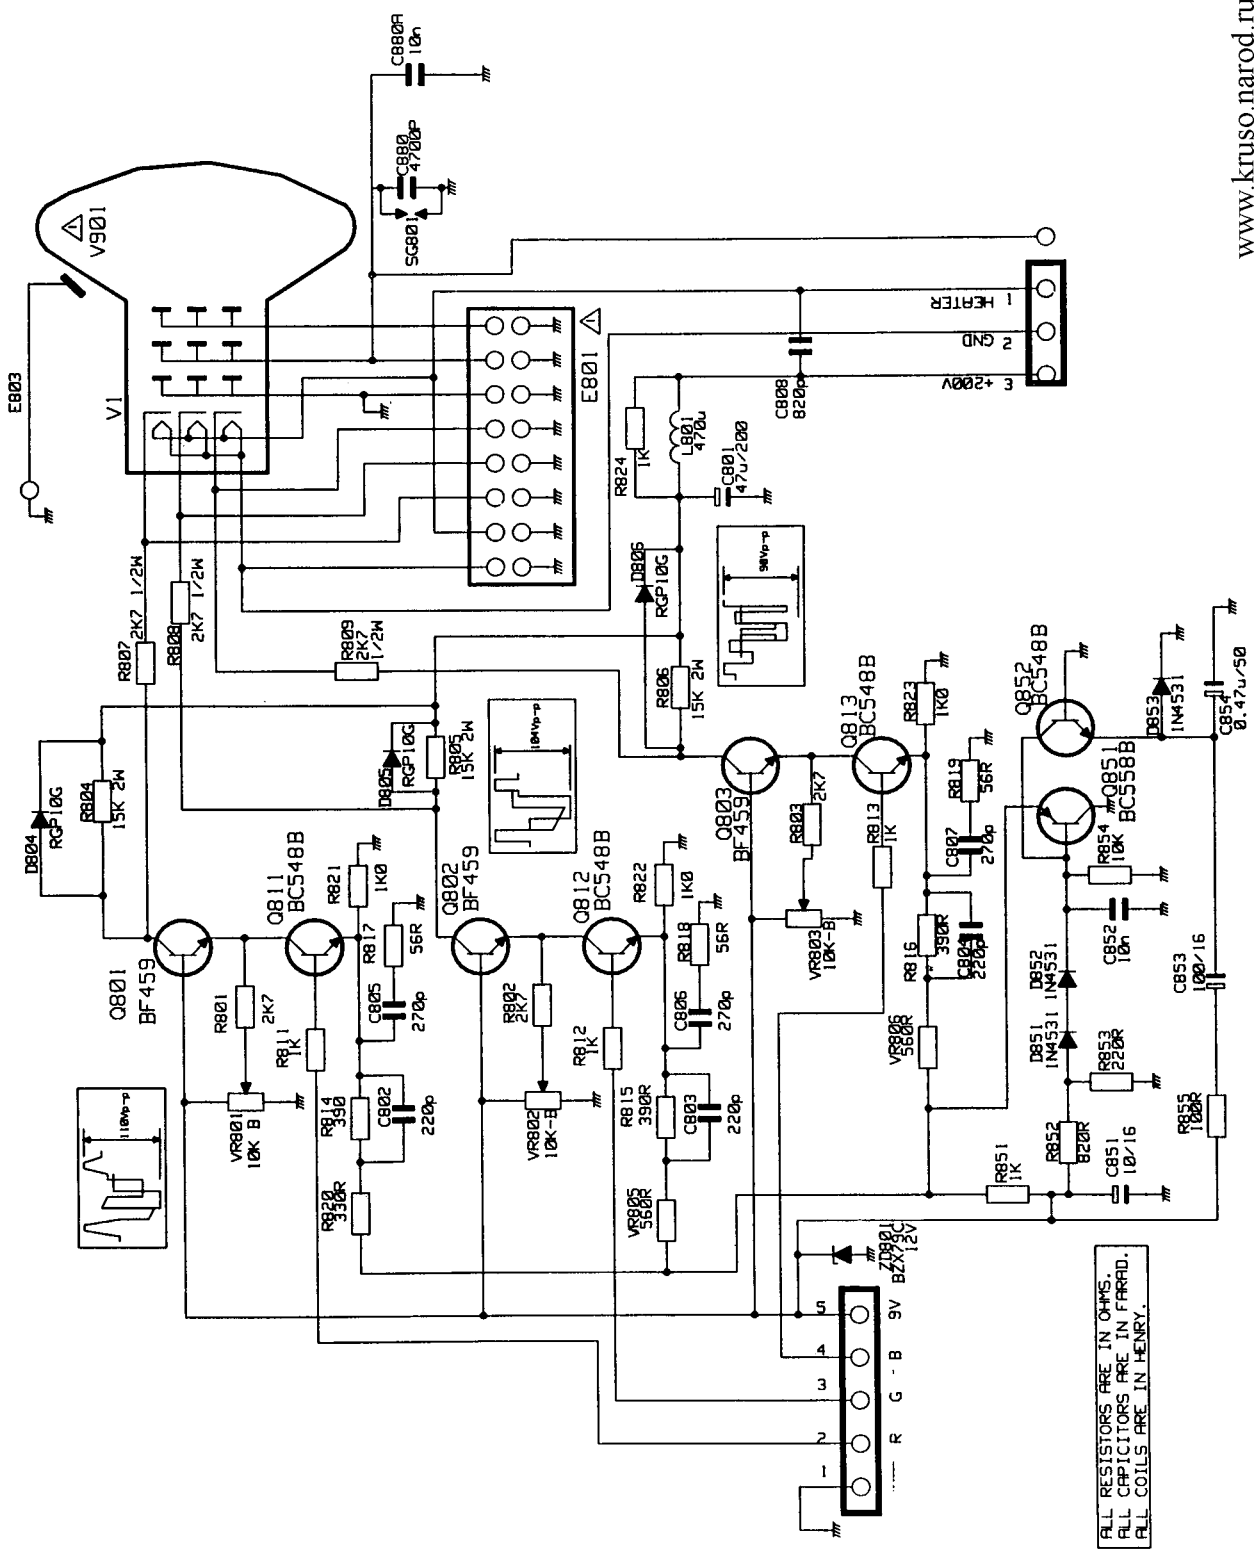

C.R.T. BASE CIRCUIT

