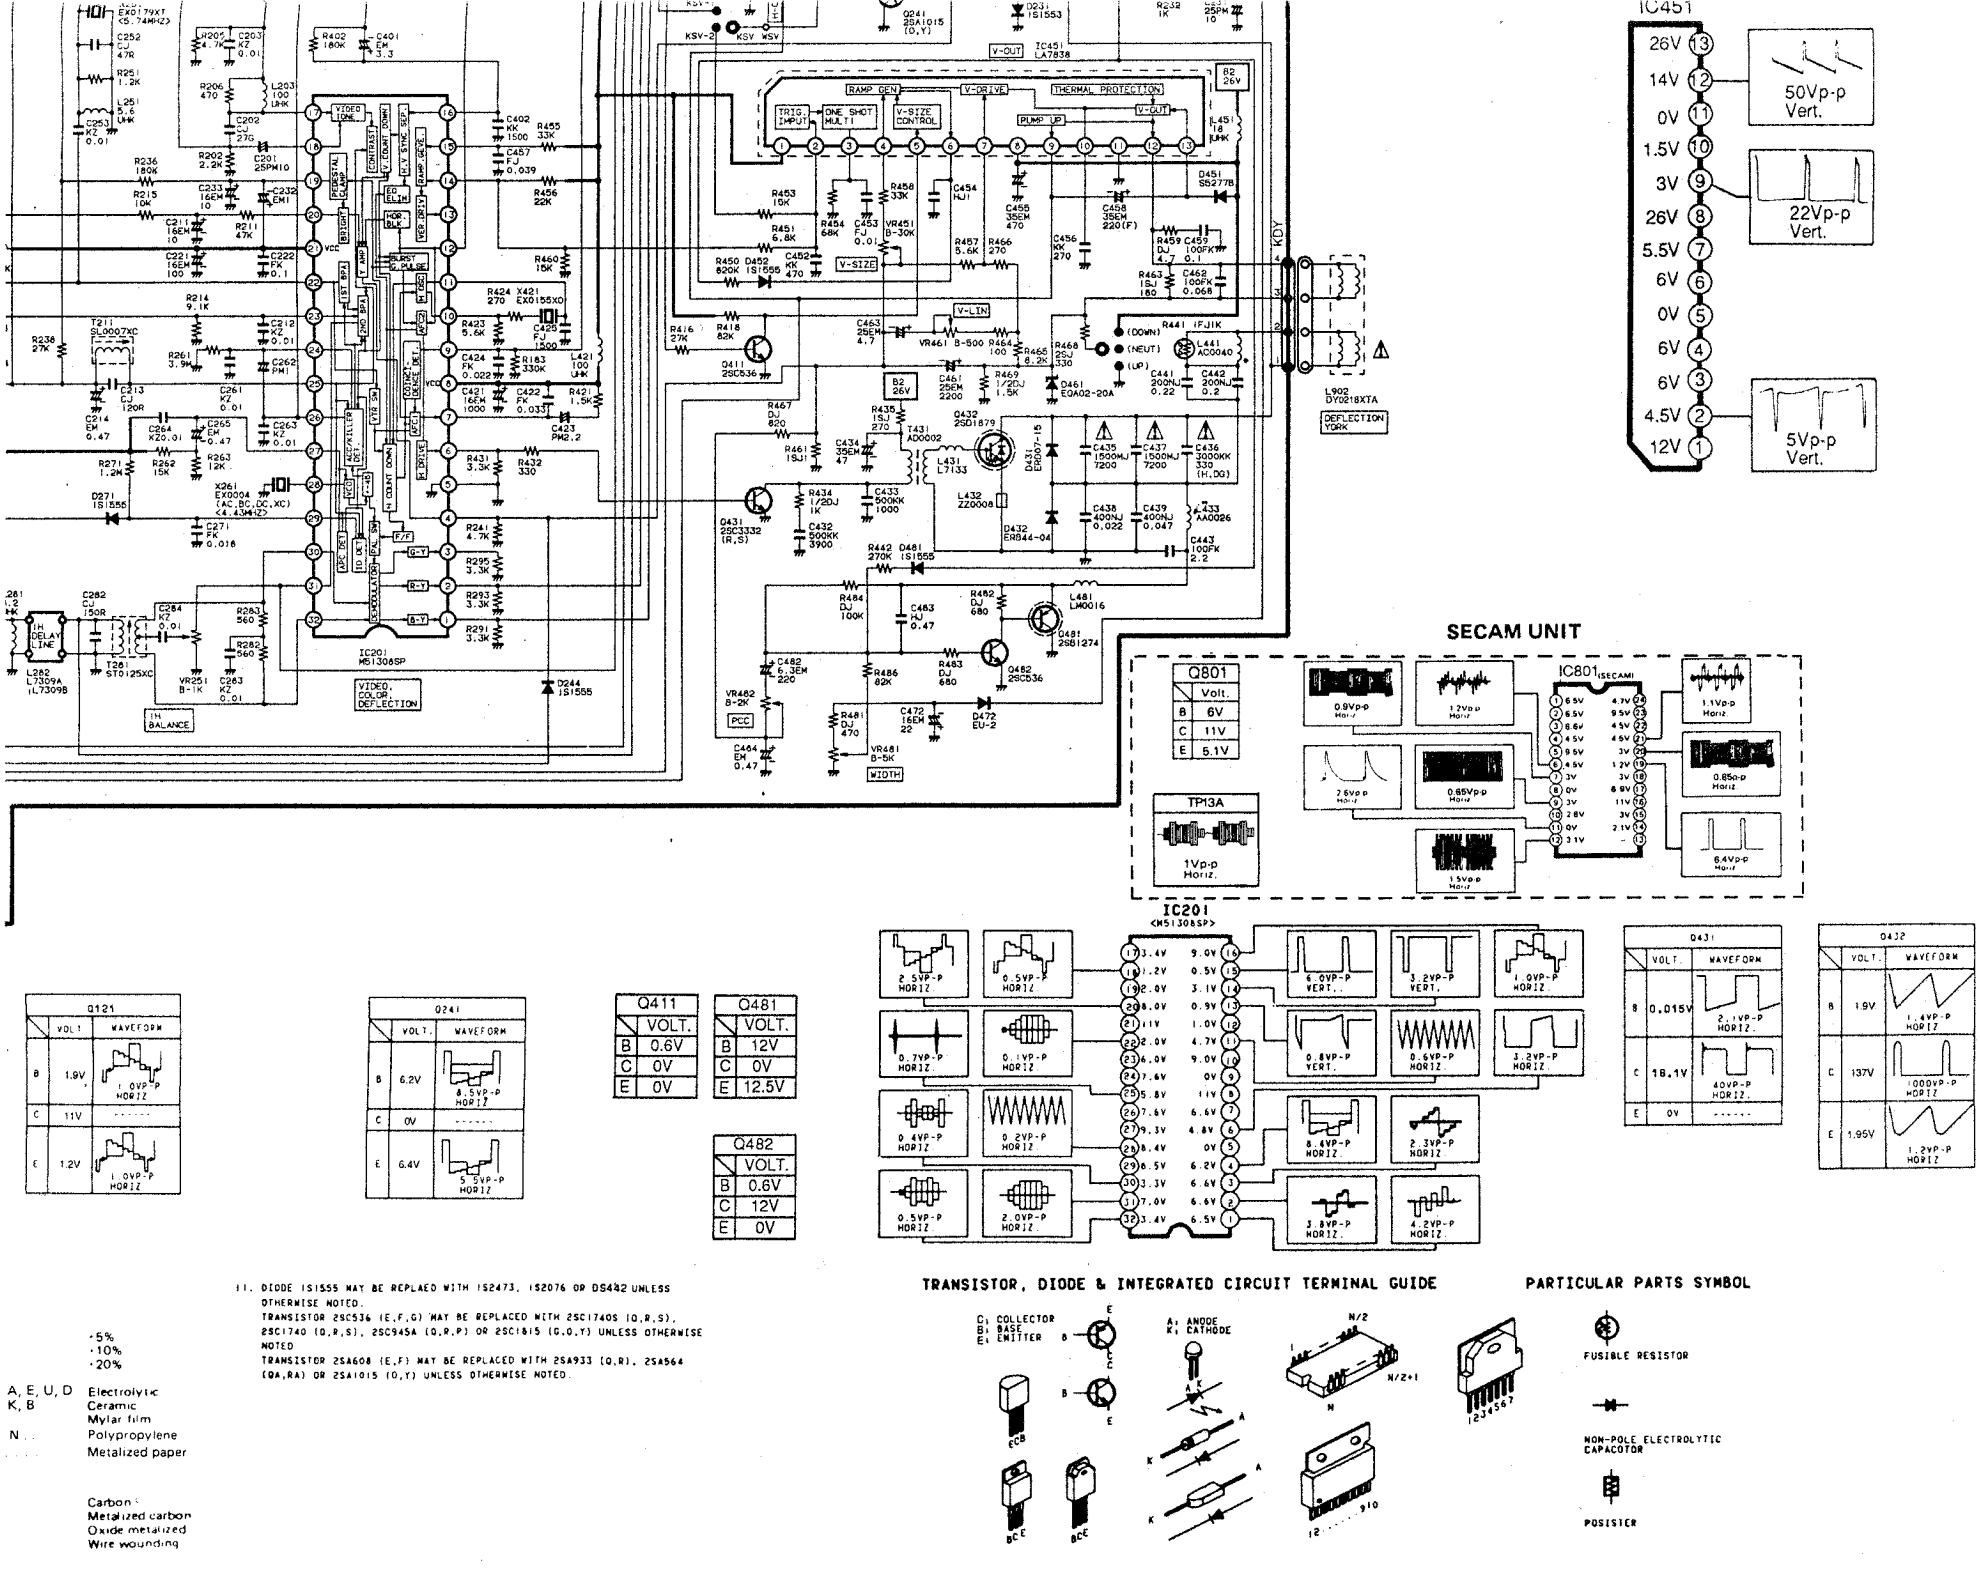

11. DIODE 1S1555 MAY BE REPLACED WITH 1S2473, 1S2076 OR DS442 UNLESS OTHERWISE NOTED.
TRANSISTOR 2SC536 (E,F,G) MAY BE REPLACED WITH 2SC1740S (Q,R,S), 2SC1740 (Q,R,S), 2SC945A (Q,R,P) OR 2SC1815 (G,O,Y) UNLESS OTHERWISE NOTED
TRANSISTOR 2SA608 (E,F) MAY BE REPLACED WITH 2SA933 (Q,R), 2SA564 (QA,RA) OR 2SA1015 (O,Y) UNLESS OTHERWISE NOTED.

·5%
·10%
·20%

A, E, U, D Electrolytic
K, B Ceramic
Mylar film
N Polypropylene
Metalized paper

Carbon
Metalized carbon
Oxide metalized
Wire wounding